



LED wall pack light

- Die-Cast housing with UV resistant powder coating
- Impact resistance PC cover
- Operating temperature: -20°C to 50°C
- THD<15%,Power Factor >0.9 radiation,No mercury pollution.
- AC 100-277V,CCT 2600~7000K.




50,000 hours Lifespan 80% Energy saving over HID lamp

Parameter

Model	Input Power Watts	Lumens(LM)	NET Weight (Kg)	CTN Size (inch)
JP-WP295-24W-L	24W	2162-2514	3.52	L13.2" xW6.2" xH11.1"
JP-WP295-48W-L	48W	4322-4826	3.81	L13.2" xW6.2" xH11.1"
JP-WP362-80W-L	80W	7214-7985	4.72	L16.4" xW7.3" xH13.1"
JP-WP362-100W-L	100W	8985-10112	4.91	L16.4" xW7.3" xH13.1"
JP-WP362-120W-L	120W	10756-12013	4.92	L16.4" xW7.3" xH13.1"
JP-WP362-150W-L	150W	13560-14923	4.95	L16.4" xW7.3" xH13.1"
JP-WP366-60W	60W	4299-4850	5.5	L16" xW11.3" xH10.1"
JP-WP366-80W	80W	6325-6586	5.5	L16" xW11.3" xH10.1"
JP-WP366-120W	120W	10458-11533	8.0	L16" xW11.3" xH10.1"
JP-WP366-150W	150W	11706-12158	8.0	L16" xW11.3" xH10.1"

Widely replace HID/HPS/MH/CFL



LED wall pack



Replace





Traditional wall pack (MH/HPS)







Dimensions



JP-WP295-24W-L
JP-WP295-48W-L




JP-WP362-80W-L
JP-WP362-100W-L
JP-WP362-120W-L
JP-WP362-150W-L









JP-WP366-60W
JP-WP366-80W
JP-WP366-120W
JP-WP366-150W

Applications

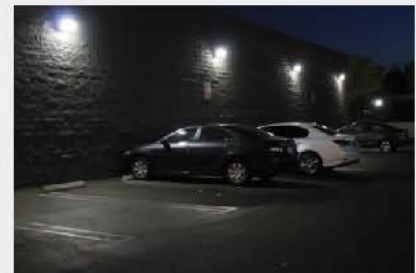

Spot stadiums, Industrial lighting, Architectural lighting etc

Installation



1. Lock the driver case on the wall with screws
2. Screw off the cable lug to connect the wire and screw it up
3. Put the lamp's spindle hole into the driver case hole
4. Connect the wire in the driver case well, screw up the nuts on the side

1. Lock the driver case on the wall with screws
2. Screw off the cable lug, put the wire through the PG connector, wired well and screw it up
3. Put the lamp's spindle hole into the driver case hole
4. Screw up the nuts on the side

JOYTECH PRODUCTS CO.,LTD

1F, No.15, Lane 27, Sec.3 Chung-king South Rd., Taipei 100, Taiwan, R.O.C

Tel : 886-2-23582899 Fax : 886-2-23415778

E-Mail : sales@joytech-jpc.com.tw Website : www.joytech-jpc.com.tw