

# Joytech Products Co., Ltd.

### JPHBL - 20W8S - 216S2

LED Corn light









General illumination Outdoor use in outdoor luminaires only (minimum lp65)

Reduces lumen maintain flux and working life if used in sealed lamp fixtures. ①

### Product features


- No UV and near-IR radiation in the light beam.
- Very low power consumption and low thermal dissipation.
- Popular, ballast free, easy installation.
- Not suitable for dimmer, electronic switches and remote control.
- Can be easily fitted and instead ordinary bulb lights.
- Mainly used in hotel, home, supermarkets and decoration.

#### **Applications**

Wall



Office







### **Electrical data**

Rated wattage	20-23 W	
Input Voltage	100-277V AC (AC90-305V is available)	
Operating frequency	50/60 Hz	
Rated power factor	>0.9	
Power Efficiency	>0.85	
Humidity	<90%	
Ambient temperature	-40~45°C	
Base (standard designation)	E26/E27/E39/E40	
Replacement conventional lamp power	45W CFL	
Dimmable	NO	

### Light technical data

Light source/count	216pcs. 2835 SMD LED	
Luminous flux	2400 Lm	
Color temperature	Warm White: 2500 - 3500K Natural White: 4000 - 5000K Cool White: 5500 - 6500K	
Color rendering index Ra	Ra > 80	
Star ting time	0 sec.	
LED emitter life	50000 hrs.	
Lifespan of LED lamp	35000 hrs.	


### Dimension & Weight



Base	E26/E27	E39/E40		
Overalllength	166m	173mm		
Diameter	73mm			
N. W	230g	250g		


## Logistical Data

### Package

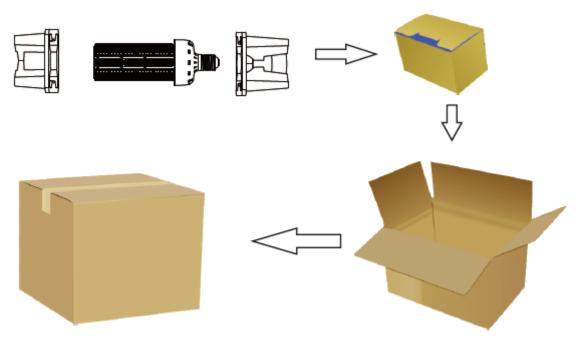


Packaging unit (Pieces/Unit)	Dimensions	Gross weight	Volume
Small box	21.5*9.5*10.5cm	230g	0.002m <sup>3</sup>
Outer carton	54*42*39.5cm	8.0Kg	0.09m <sup>3</sup>

### **Installation**

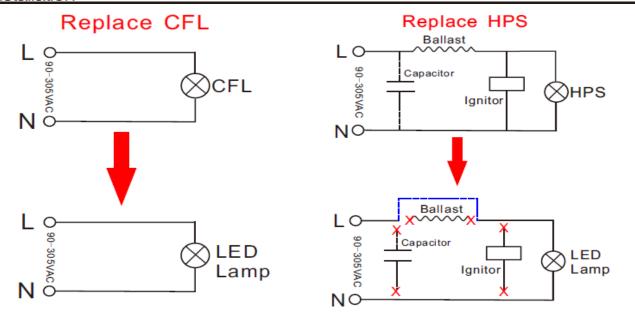


**Light Distribution Diagram** 

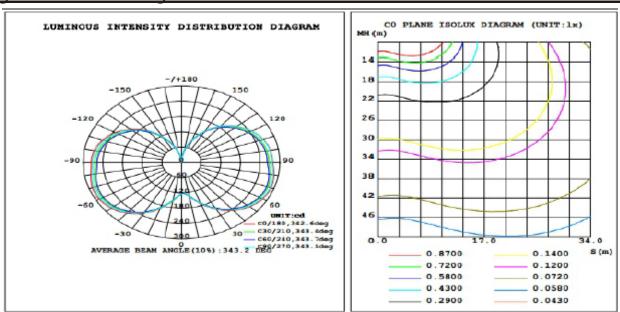

#### Attendtion-1

When the products are used in the outdoor lighting, ensure the space is waterproof and well ventilated. Pay attention to the size of the confined space. Ensure the lamp has enough space for heat dissipation which ensures lumen maintenance and extends its working life.

As shown below for your reference



When 20W warehouse light is used in confined space, the diameter must be more than 25cm.

### Attendtion-2

Key benefits of comparison	LED energy saving light 20W	Ectone high lumen twister 45W	Incandescent lamp 200W
Luminous Flux (Lm)	2400	2200	2400
Efficiency (Lm/W)	119	55	15
Better color appearance measured in color rendering index	83	83	98
Wide Color Availability in CCT (Kelvin)	2700-6700	2700-6700	2700
Star ting time, quick start (min)	0	3	0
The life of the lamp (H)	35000	8000	5000



### Additional product data

All technical parameters apply to the entire lamp/Due to the complex production process for light-emitting diodes; the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value.

### Disclaimer

Subject changes without notice except errors and omission. Always make sure to use the most recent release.

JOYTECH PRODUCTS CO., LTD.

1F, No.15, Lane 27, Sec. 3 Chung-king South Rd., Taipei 100, Taiwan, R.O.C.
Tel: 886-2-23582899 Fax: 886-2-23415778

E-Mail: sales@joytech-jpc.com.tw Website: www.joytech-jpc.com.tw