




Joytech Products Co., Ltd.

LED


CREE COB Garden Spot Light



B83506COB




B83506COB




B83308COB



B83514COB



B83514COB



B83314COB



B83310COB




B83310COB




B83510COB

36° Reflector/10W -3000K

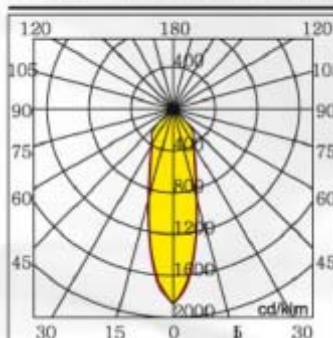

H[m]	D[m]	MaxLux	MedLux
0.60	0.32	2647	1560
1.20	0.63	662	390
1.80	0.95	294	173
2.40	1.26	165	98
3.00	1.58	106	62

36° Reflector/14W-3000K

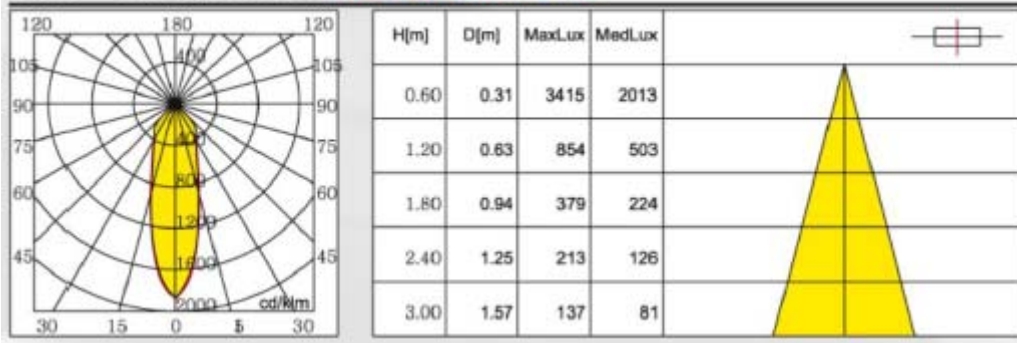

Specification

- Housing: Aluminum anodized finishing or powder painting
- Front cover: Aluminum anodized finishing or powder painting
- Glass: Tempered glass T= 3mm
- Lens: Optical lens, efficiency $\geq 85\%$
- Cable gland: Copper and nickel coated
- Gasket: Tooling shaped seal
- LED: CREE COB LED
- Driver: Constant current output
- Spike: PVC (gray or black)
- Mounting base: Aluminum anodized finishing or powder painting
- Power Cable: H05RN-F 2 x 0.75mm² L= 1m (low voltage)
H05RN-F 3 x 0.75mm² L= 1m (high voltage)

Item No.	Light source	Degree (°C)	Input voltage (V)	Typical operating current (mA)	Typical consumption (W)	Typical luminance (lm)	Ik rate
B83306COB, B83506COB	1 x 6W COB	24 / 36 / 60	12VDC, 24VDC, 240V	12V= 500mA, 24V= 260mA, 240V= 27mA	12V= 6W, 24V= 6.2W, 240V= 6.5W	Cool white = 400 Warm white = 320	04
B83310COB, B83510COB	1 x 10W COB	24 / 36 / 60	24VDC, 240V	12V= 458mA, 240V= 52mA	24V= 11W, 240V= 12.5W	Cool white = 900 Warm white = 720	04

JOYTECH PRODUCTS CO., LTD.

1F, No.15, Lane 27, Sec. 3 Chung-king South Rd., Taipei 100, Taiwan, R. O. C.

Tel: 886-2-23582899 Fax: 886-2-23415778

E-Mail: sales@joytech-jpc.com.tw Website: www.joytech-jpc.com.tw